

DCA



2016
POWER TOOLS CATALOGUE

DCA

PROFESSIONAL POWER TOOLS

CONTENTS

	Li-ion Battery Cordless Power Tools	01-05		ELECTRIC PLANER	19		DUST-FREE SAW	29
	Ni-Cd Battery Cordless Power Tools	05		WOOD ROUTER	20		VACUUM CLEANER	30
	ANGLE GRINDER	06-08		JIG SAW	20		AIRLESS HIGH-PRESSURE SPRAYING UNIT	30
	STRAIGHT SANDER	08		DISC SANDER	21		BLOWER VACUUM	31
	BENCH GRINDER	09		SANDER POLISHER	21		HEAT GUN	31
	MARBLE CUTTER	09-10		TRIMMER	21-22		MAGNETIC DRILL	31
	ELECTRIC GROOVE CUTTER	10		RECIPROCATING SAW	22		INFRARED TEMPERATURE INSTRUMENT	32
	ELECTRIC DRILL	10-12		ELECTRIC CHAIN SAW	22-23		MULTI-DETECTOR	32
	ELECTRIC MIXER	13		ELECTRIC CUT-OFF MACHINE	23		LASER LEVEL	32-33
	ELECTRIC IMPACT DRILL	13-14		DRYWALL SANDER	23		LASER DISTANCE METER	33
	ELECTRIC IMPACT DRILL (TOOL KIT)	14		PERCUSSION HAMMER	24-25		PNEUMATIC TOOLS	34-35
	ELECTRIC ROTARY HAMMER	14-16		ELECTRIC SHEAR	25		ENGINE	36
	DIE GRINDER	16-17		ELECTRIC NIBBLER	25		GASOLINE WATER PUMP	37
	WELD JOINT BEVELLER	17		IMPACT SCREWDRIVER	25		GARDEN TOOLS	38-39
	TAPPER	17		ELECTRIC WRENCH	25-26		WELDING MACHINES	40-41
	ORBITAL SANDER	17-18		DIAMOND DRILL WITH WATER SOURCE	26-27			
	BELT SANDER	19		ELECTRIC CIRCULAR SAW	28			
	GRINDING POLISHER	19		ELECTRIC MITRE SAW	29			





Cabl



CORDLESS SCREWDRIVER ADPL5 (Type C)

Battery	4V/1.5Ah
Max.Screw Dia.(mm)	5
No-Load Speed(r/min)	200
Net Weight(kg)	0.35



Bracket Charger



CORDLESS SCREWDRIVER ADPL02-5 (Type B)

Battery	4V/1.5Ah
Max.Screw Dia.(mm)	5
No-Load Speed(r/min)	200
Net Weight(kg)	0.35



CORDLESS SCREWDRIVER ADPL8 (Type B)

Battery	12V/1.5Ah x 2
Max.Screw Dia.(mm)	6
No-Load Speed(r/min)	High 0-1060 Low 0-270
Net Weight(kg)	1.0



CORDLESS IMPACT DRIVER ADPL02-8 (Type A)

Battery	12V/1.5Ah x 2
No-Load Speed(RPM)	0-2400
Rated Impacts(.../min)	0-3000
Max.Fastening Torque(RPM)	100
Net Weight(kg)	1.0



CORDLESS IMPACT DRIVER ADPL14 (Type E)

Battery	18V/4.0Ah x 2
No-Load Speed(RPM)	0-2200
Rated Impacts(.../min)	0-3200
Max.Fastening Torque(RPM)	150
Net Weight(kg)	1.75



CORDLESS BRUSHLESS IMPACT DRIVER ADPL02-14 (Type E)/(Type F)

Battery	18V/4.0Ah x 2 / 18V/5.0Ah x 2
Clamping Capacity	6.35mm Hex.
Max.Screw Dia.(mm)	14
Torque Setting	Smart-loosen Low 140N · m High 175N · m
No-Load Speed(RPM)	Low 0-2000 High 0-2400
Rated Impacts(.../min)	Low 0-2900 High 0-3200
Net Weight(kg)	1.75



CORDLESS DRIVER DRILL ADJZ09-10 (Type A) ADJZ09-10 (Type B)

Battery	12V/1.5Ah x 2 / 12V/1.5Ah x 1
Max.Screw Dia.(mm)	7
No-Load Speed(r/min)	0-700
Max.Chucking Capacity(mm)	10
Max.Drilling Capacity	
Steel(mm)	Φ10
Wood(mm)	Φ20
Net Weight(kg)	1.0



Plastic Case Packing
Color Box Packing

CORDLESS DRIVER DRILL ADJZ10-10 (Type A)/(Type B)

Battery	12V/1.5Ah x 2
Max.Screw Dia.(mm)	7
No-Load Speed(r/min)	High 0-1500 Low 0-400
Max.Chucking Capacity(mm)	10
Max.Drilling Capacity	
Steel(mm)	Φ10
Wood(mm)	Φ20
Net Weight(kg)	1.1



CORDLESS ANGLE DRIVER DRILL ADJZ14-10 (Type A)

Battery	12V/1.5Ah x 2
Max.Screw Dia.(mm)	6.5
No-Load Speed(r/min)	0-800
Max.Chucking Capacity(mm)	10
Max.Drilling Capacity	
Steel(mm)	Φ10
Wood(mm)	Φ25
Net Weight(kg)	1.0

CORDLESS COMBO KIT **ADKIT01(Type A)**



+



CORDLESS IMPACT DRIVER
ADPL02-8

CORDLESS DRIVER DRILL
ADJZ10-10

CORDLESS COMBO KIT **ADKIT01(Type E)**



+



CORDLESS IMPACT DRIVER
ADPL02-8

CORDLESS DRIVER DRILL
ADJZ10-10

CORDLESS COMBO KIT **ADKIT02(Type A)**



+



CORDLESS DRIVER DRILL
ADJZ10-10

CORDLESS SABRE SAW
ADJF15

CORDLESS COMBO KIT **ADKIT04(Type E)**



+



CORDLESS DRIVER / HAMMER DRILL
ADJZ13

CORDLESS IMPACT DRIVER
ADPL14

CORDLESS COMBO KIT **ADKIT05(Type E)**



+



CORDLESS DRIVER / HAMMER DRILL
ADJZ13

CORDLESS IMPACT WRENCH
ADPB16

CORDLESS COMBO KIT **ADKIT06(Type E)**



+



CORDLESS IMPACT DRIVER
ADPL02-8

CORDLESS IMPACT DRIVER
ADPL02-8



CORDLESS DRIVER DRILL
ADJZ15-10(Type E)

Battery	12V/2.0Ah × 2
Max.Screw Dia.(mm)	7
No-Load Speed(r/min)	0-700
Max.Chucking Capacity(mm)	10
Max.Drilling Capacity	
Steel(mm)	Φ10
Wood(mm)	Φ20
Net Weight(kg)	1.0



CORDLESS DRIVER DRILL
ADJZ17-10(Type A)

Battery	12V/1.5Ah × 2
Max.Screw Dia.(mm)	7
No-Load Speed(r/min)	0-550
Max.Chucking Capacity(mm)	10
Max.Drilling Capacity	
Steel(mm)	Φ10
Wood(mm)	Φ20
Net Weight(kg)	1.0



CORDLESS MULTI-TOOL
ADMD12 (Type A) / (Type E)

Battery	12V/1.5Ah × 2 / 12V/2.0Ah × 2
Oscillation(/min)	5000-20000
Speed Shifting Gears	2-4-6-8-10-12
Oscillation Angle(°)	3
Power Display	3
Net Weight(kg)	0.95



CORDLESS DIE GRINDER ADSJ10(Type A)

Battery	12V/1.5Ah x 2
Rated Speed(r/min)	5000-32000
Speed Shifting Gears	1-2-3-4-5-6
Max.Grinding Wheel Diameter(mm)	10
Power Display	3
Net Weight(kg)	0.61



NEW



CORDLESS CAULK GUN ADPJ12(TYPE A)

Battery	12V/1.5Ah x 2
Max. Pushing force(N)	3400
Feed Speed (mm/s)	0-12.9
Stroke (mm)	213
Sealant Type	300ml
Net Weight (kg)	1.85



NEW



CORDLESS CAULK GUN ADPJ12(TYPE E)

Battery	12V/1.5Ah x 2
Max. Pushing force(N)	3400
Feed Speed (mm/s)	0-12.9
Stroke (mm)	213/355
Sealant Type	300ml/600ml
Net Weight (kg)	1.85



CORDLESS CLEANER ADXC12 (Type B)

Battery	12V/1.5Ah
Max.Air Flow.(m/min)	1.2
Air Pressure(Kpa)	1.8
Contionuous Use(minutes,approx)	20
Net Weight(kg)	0.9



NEW



CORDLESS SABRE SAW ADJF15(Type A)

Battery	12V/1.5Ah x 2
Stroke(mm)	14.5
Max. Cutting Depth	
Metal(mm)	8
Wood(mm)	65
Pipe Diameter(mm)	φ 50
No-Load Speed(r/min)	0-3000
Net Weight(kg)	1.2



NEW



CORDLESS BLIND RIVETING GUN 12V ADPM50(TYPE A)

Battery	12V/1.5AhX2
Stroke (mm)	20
Capacity	φ 2.5-5.0 For All-purpose φ 6.0 For Aluminum Blind Rivet
Max. Tension (N)	10000
Net Weight (kg)	1.6



NEW



CORDLESS PVC SHEAR 12V ADPV50(TYPE B)

Battery	12V/1.5Ah x2
Shearing Capacity (mm)	Ø12-Ø50
No-Load Speed	≤4s/cut (Max. Speed)
Net Weight (kg)	2



CORDLESS DRIVER / HAMMER DRILL ADJZ13 (Type A) / (Type E)

Battery	18V/3.0Ah x 2 / 18V/4.0Ah x 2
Max. Chucking Capacity(mm)	13
Max.Screw Dia.(mm)	10
Blows per minute(BPM)	0-36000
No-Load Speed	
Step 1(r/min)	0-400
Step 2(r/min)	0-2000
Max. Drilling Diameter	
Steel(mm)	13
Wood(mm)	38
Torque Setting	25+2
Max. Torque(N.m)	70
Net Weight(mm)	2.2



CORDLESS BRUSHLESS DRIVER/HAMMER DRILL ADJZ16 (Type E)

Battery	18V/4.0Ah×2
Max. Screw Dia. (mm)	16
No-Load Speed(r/min)	0-1200
Max. Drilling Capacity	
Steel(mm)	φ16
Wood(mm)	φ38
Max. Fastening Torque(N.m)	45
Net Weight(kg)	2.2



CORDLESS IMPACT WRENCH ADPB10 (Type A)

Battery	12V/1.5Ah × 2
No-Load Speed(RPM)	0-2400
Rated Impacting Frequency(.../min)	0-3000
Max. Fastening Torque(N.M)	110
Net Weight(kg)	1.0



CORDLESS IMPACT WRENCH

ADPB16 (Type A)

ADPB16 (Type E)

ADPB16 (Type F)

Battery	18V/3.0Ah × 2 / 18V/4.0Ah × 2 / 18V/5.0Ah × 2
No-Load Speed(RPM)	0-2200
Rated Impacting Frequency(.../min)	0-3200
Max. Fastening Torque(N.M)	230
Net Weight(kg)	1.75



CORDLESS IMPACT WRENCH ADPB20 (Type F)

Battery	18V/5.0Ah × 2
Applicable Screw Diameter (mm)	M16-M20
No-Load Speed(RPM)	0-1700
Rated Impacting Frequency(.../min)	0-2000
Max. Fastening Torque(N.M)	650
Net Weight(kg)	3.2



CORDLESS RECIPROCATING SAW ADJF28 (Type B)

Battery	18V/4.0Ah × 2
No-Load Strokes(.../min)	0-3300
Length Of Strokes(mm)	28
Max. Cutting Capacity	
Steel(mm)	20
Wood(mm)	250
Tube Diameter(mm)	130
Net Weight(kg)	3.4



CORDLESS BLOWER ADQF28 (Type B)

Battery	18V/4.0Ah × 1
No-Load Speed(r/min)	
Step 1	11000 ± 14%
Step 2	15000 ± 11%
Step 3	19000 ± 10%
Capacity(m³/min)	1.6-2.8
Net Weight(kg)	1.9



CORDLESS BRUSHLESS IMPACT WRENCH ADPB18 (Type E)

Battery	18V/4.0Ah × 2
Applicable Screw Diameter (mm)	M12-M18
Square Drive Size (mm)	12.7 (1/2")
Torque Setting	Smart-loosen
Step L (N.m)	240
Step H (N.m)	300
No-Load Speed	
Step L (r/min)	0-2000
Step H (r/min)	0-2400
Rated Impacting Frequency	
Step L (.../min)	0-2900
Step H (.../min)	0-3200
Net Weight(kg)	1.7



CORDLESS BRUSHLESS IMPACT WRENCH ADPB18 (Type F)

Battery	18V/5.0Ah × 2
Applicable Screw Diameter (mm)	M12-M18
Square Drive Size (mm)	12.7 (1/2")
Torque Setting	Smart-loosen
Step L (N.m)	240
Step H (N.m)	300
No-Load Speed	
Step L (r/min)	0-2000
Step H (r/min)	0-2400
Rated Impacting Frequency	
Step L (.../min)	0-2900
Step H (.../min)	0-3200
Net Weight(kg)	1.7



CORDLESS WORK LIGHT ADWL12 (Type B)/(Type C)

Battery	12V/1.5Ah
Continuous Lighting Time(h)	10
LED(pcs)	16
Lamp Adjusting Angle(°)	110
Net Weight(kg)	0.32

Product come without battery and charger, which are sold separately (Type C)



CORDLESS ANGLE GRINDER ADSM100(Type E)

Battery	18V/4.0Ah x 2
Max. Wheel Diameter(mm)	Φ 100
Hole Diameter of Wheel(mm)	Φ 16
Rated Speed(r/min)	10000
Spindle Thread	M10
Net Weight(kg)	2.1



CORDLESS ANGLE GRINDER ADSM115(Type E) ADSM125(Type E)

Battery	18V/4.0Ah x 2
Max. Wheel Diameter(mm)	Φ 115/Φ 125
Hole Diameter of Wheel(mm)	Φ 22
Rated Speed(r/min)	10000
Spindle Thread	M14
Net Weight(kg)	2.2



CORDLESS HEDGE TRIMMER ADYD550

Battery	40V/5.0Ah x 2
charging time (mins./pack.)	< 45
Single battery operation time(mins./pack)	> 60
Max. trim range (mm)	550
Max. cutting diameter(mm)	Φ 10
No-Load speed(spm)	1200-2200(6.)
Angle of rotation(°)	0/45/90(Left-Right)
Net Weight(kg)	4.8



CORDLESS PRUNER ADYD14(Type B)

Battery	4V/2.0Ah
Max. Cutting Diameter(mm)	Φ14 New Branch
No-Load Shear Frequency(.../min)	50
Net Weight(kg)	0.71



CORDLESS DRIVER DRILL ADJZ6(TYPE B)

Battery	12V/1.5Ah x 2
Max. Screw Dia.(mm)	6
No-Load Speed(r/min)	0-700
Max. Fastening Torque(N.m)	15
Max. Drilling Capacity	
Steel(mm)	Φ 6
Wood(mm)	Φ 12
Net Weight(kg)	0.9



CORDLESS DRIVER DRILL ADJZ05-10(Type A)/ADJZ06-10(Type A)

Battery	9.6V/1.7Ah x 2 / 12V/1.7Ah x 2
Max. Screw Dia.(mm)	6
No-Load Speed(r/min)	0-600
Max. Drilling Capacity	
Steel(mm)	Φ 10
Wood(mm)	Φ 20
Net Weight(kg)	1.33 / 1.4



CORDLESS DRIVER DRILL ADJZ07-10(Type A)

Battery	12V/1.7Ah x 2
Max. Screw Dia.(mm)	6
No-Load Speed(r/min)	High 0-1060 Low 0-270
Max. Drilling Capacity	
Steel(mm)	Φ 10
Wood(mm)	Φ 20
Net Weight(kg)	1.5



CORDLESS DRIVER DRILL ADJZ08-10(Type A)

Battery	14.4V/1.7Ah x 2
Max. Screw Dia.(mm)	6
No-Load Speed(r/min)	High 0-1270 Low 0-330
Max. Drilling Capacity	
Steel(mm)	Φ 10
Wood(mm)	Φ 20
Net Weight(kg)	1.6



CORDLESS SCREWDRIVER ADPL03-8(Type A)

Battery	12V/1.7Ah x 2
Max. Screw Dia.(mm)	6
No-Load Speed(r/min)	High 0-1060 Low 0-270
Net Weight(kg)	1.4



ANGLE GRINDER
ASM100A/ASM115/ASM100B
 Max. Wheel Diameter(mm) ϕ 100/ ϕ 115/ ϕ 100
 Hole Diameter of Wheel(mm) ϕ 16/ ϕ 22/ ϕ 16
 Rated Power Input(W) 540/540/750
 Rated Speed(r/min) 13000
 Net Weight(kg) 1.7



ANGLE GRINDER
ASM02-100A
 Max. Wheel Diameter(mm) ϕ 100
 Hole Diameter of Wheel(mm) ϕ 16
 Rated Power Input(W) 570
 Rated Speed(r/min) 13000
 Net Weight(kg) 1.8



ANGLE GRINDER
ASM03-100A/ASM02-115
 Max. Wheel Diameter(mm) ϕ 100/ ϕ 115
 Hole Diameter of Wheel(mm) ϕ 16/ ϕ 22
 Rated Power Input(W) 710
 Rated Speed(r/min) 13000
 Net Weight(kg) 1.6



ANGLE GRINDER
ASM04-100A
 Max. Wheel Diameter(mm) ϕ 100
 Hole Diameter of Wheel(mm) ϕ 16
 Rated Power Input(W) 560
 Rated Speed(r/min) 13000
 Net Weight(kg) 1.7



ANGLE GRINDER
ASM05-100B
 Max. Wheel Diameter(mm) ϕ 100
 Hole Diameter of Wheel(mm) ϕ 16
 Rated Power Input(W) 850
 Rated Speed(r/min) 13000
 Net Weight(kg) 1.7



ANGLE GRINDER
ASM06-100
 Max. Wheel Diameter(mm) ϕ 100
 Hole Diameter of Wheel(mm) ϕ 16
 Rated Power Input(W) 800
 Rated Speed(r/min) 9000
 Net Weight(kg) 2.0



ANGLE GRINDER
ASM08-100
 Max. Wheel Diameter(mm) ϕ 100
 Hole Diameter of Wheel(mm) ϕ 16
 Rated Power Input(W) 800
 Rated Speed(r/min) 13000
 Net Weight(kg) 1.6



ANGLE GRINDER
ASM09-100 /ASM05-115
 Max. Wheel Diameter(mm) ϕ 100 / ϕ 115
 Hole Diameter of Wheel(mm) ϕ 16 ϕ 22
 Rated Power Input(W) 710
 Rated Speed(r/min) 13000/11800
 Net Weight(kg) 1.3



ANGLE GRINDER
ASM09-100S
 Max. Wheel Diameter(mm) ϕ 100
 Hole Diameter of Wheel(mm) ϕ 16
 Rated Power Input(W) 800
 Rated Speed(r/min) 12000
 Net Weight(kg) 1.6



ANGLE GRINDER

ASM10-100 / ASM10-100S

Max. Wheel Diameter(mm)	φ 100
Hole Diameter of Wheel(mm)	φ 16
Rated Power Input(W)	1020
Rated Speed(r/min)	13000
Net Weight(kg)	2.1



ANGLE GRINDER

ASM11-100

Max. Wheel Diameter(mm)	φ 100
Hole Diameter of Wheel(mm)	φ 16
Rated Power Input(W)	710
Rated Speed(r/min)	13000
Net Weight(kg)	1.6



ANGLE GRINDER

ASM12-100

Max. Wheel Diameter(mm)	φ 100
Hole Diameter of Wheel(mm)	φ 16
Rated Power Input(W)	850
Rated Speed(r/min)	13000
Net Weight(kg)	2.1



ANGLE GRINDER

ASM125A / ASM03-115

Max. Wheel Diameter(mm)	φ 125 / φ 115
Hole Diameter of Wheel(mm)	φ 22
Rated Power Input(W)	850
Rated Speed(r/min)	11800
Net Weight(kg)	1.8



ANGLE GRINDER

ASM02-125B / ASM06-115

Max. Wheel Diameter(mm)	φ 125 / φ 115
Hole Diameter of Wheel(mm)	φ 22
Rated Power Input(W)	1200
Rated Speed(r/min)	11800
Net Weight(kg)	3.0



ANGLE GRINDER

ASM03-125

Max. Wheel Diameter(mm)	φ 125
Hole Diameter of Wheel(mm)	φ 22
Rated Power Input(W)	800
Rated Speed(r/min)	9000
Net Weight(kg)	2.1



ANGLE GRINDER

ASM04-125

Max. Wheel Diameter(mm)	φ 125
Hole Diameter of Wheel(mm)	φ 22
Rated Power Input(W)	1020
Rated Speed(r/min)	11800
Net Weight(kg)	2.1



ANGLE GRINDER

ASM150A

Max. Wheel Diameter(mm)	φ 150
Hole Diameter of Wheel(mm)	φ 22
Rated Power Input(W)	1200
Rated Speed(r/min)	9000
Net Weight(kg)	3.0



ANGLE GRINDER

ASM03-150 /ASM03-150 S

Max. Wheel Diameter(mm)	φ 150
Hole Diameter of Wheel(mm)	φ 22
Rated Power Input(W)	1400
Rated Speed(r/min)	9000
Net Weight(kg)	3.3



ANGLE GRINDER

ASM180A/ASM180S

Max. Wheel Diameter(mm)	φ 180
Hole Diameter of Wheel(mm)	φ 22
Rated Power Input(W)	2020/2600
Rated Speed(r/min)	8300
Net Weight(kg)	5.0



Soft Start



ANGLE GRINDER

ASM03-230

Max. Wheel Diameter(mm)	φ 230
Hole Diameter of Wheel(mm)	φ 22
Rated Power Input(W)	2200
Rated Speed(r/min)	6600
Net Weight(kg)	5.0



Optional Function:Soft Start



ANGLE GRINDER

ASM02-180B

Max. Wheel Diameter(mm)	φ 180
Hole Diameter of Wheel(mm)	φ 22
Rated Power Input(W)	2020
Rated Speed(r/min)	8300
Net Weight(kg)	6.0



ANGLE GRINDER

ASM05-180/ASM05-230

Max. Wheel Diameter(mm)	φ 180/φ 230
Hole Diameter of Wheel(mm)	φ 22
Rated Power Input(W)	3000
Rated Speed(r/min)	8300
Net Weight(kg)	5.0



Optional:Soft Start



ANGLE GRINDER

ASM03-180

Max. Wheel Diameter(mm)	φ 180
Hole Diameter of Wheel(mm)	φ 22
Rated Power Input(W)	2200
Rated Speed(r/min)	8300
Net Weight(kg)	5.0



Soft Start



ANGLE GRINDER

ASM230A

Max. Wheel Diameter(mm)	φ 230
Hole Diameter of Wheel(mm)	φ 22
Rated Power Input(W)	2020
Rated Speed(r/min)	6600
Net Weight(kg)	5.0



STRAIGHT SANDER

ASS150/ASS125B

Max. Wheel Diameter(mm)	φ 150/φ 125
Hole Diameter of Wheel(mm)	φ 20
Rated Power Input(W)	1020/710
Rated Speed(r/min)	5000/5300
Net Weight(kg)	4.7/4.3



Soft Start



ANGLE GRINDER

ASM02-230B

Max. Wheel Diameter(mm)	φ 230
Hole Diameter of Wheel(mm)	φ 22
Rated Power Input(W)	2020
Rated Speed(r/min)	6600
Net Weight(kg)	6.5

NEW



BENCH GRINDER ASE125/ASE150

Max.Wheel Diameter(mm) 125×12.7×16/150×20×32
Rated Power Input(W) 250
Rated Speed(r/min) 2840
Net Weight(kg) 6.8/7.6

NEW



BENCH GRINDER ASE200/ASE250

Max.Wheel Diameter(mm) 200×20×32/250×25×32
Rated Power Input(W) 370
Rated Speed(r/min) 2840
Net Weight(kg) 12.9/21.5



MARBLE CUTTER AZE110 /AZE115

Blade Diameter(mm) ϕ 110 / ϕ 115
Max.Cutting Capacity(mm) 30
Rated Power Input(W) 1200
No-Load Speed(r/min) 13000
Net Weight(kg) 3.0



MARBLE CUTTER AZE02-110 /AZE02-110B

Blade Diameter(mm) ϕ 110
Max.Cutting Capacity(mm) 30
Rated Power Input(W) 1240
No-Load Speed(r/min) 13000
Net Weight(kg) 3.1



MARBLE CUTTER AZE03-110

Blade Diameter(mm) ϕ 110
Max.Cutting Capacity(mm) 34
Rated Power Input(W) 1050
No-Load Speed(r/min) 13300
Net Weight(kg) 3.1



MARBLE CUTTER AZE04-110

Blade Diameter(mm) ϕ 110
Max.Cutting Capacity(mm) 30
Bevel Cutting Angle (°) 0-45
Rated Power Input(W) 1240
No-Load Speed(r/min) 13000
Net Weight(kg) 3.2



MARBLE CUTTER AZE05-110

Blade Diameter(mm) ϕ 110
Max. Cutting Capacity (mm) 30
Bevel Cutting Angle (°) 0-45
Rated Power Input(W) 1600
No-Load Speed (r/min) 12000
Net Weight (kg) 3.2



MARBLE CUTTER AZE180

Blade Diameter(mm) ϕ 180
Max.Cutting Capacity(mm) 60
Rated Power Input(W)* 1520
No-Load Speed(r/min) 5000
Net Weight(kg) 7.0



MARBLE CUTTER AZE02-180

Blade Diameter(mm)	Φ 180
Max. Cutting Capacity (mm)	58
Rated Power Input(W)	1900
No-Load Speed(r/min)	5000
Net Weight(kg)	7.0



ELECTRIC GROOVE CUTTER AZR110

Blade Diameter(mm)	Φ110
Rated Power Input (W)	1600
No-Load Speed (r/min)	10800
Max. Cutting Depth (mm)	32
Max. Cutting Width (mm)	50
Net Weight (kg)	4.1



ELECTRIC GROOVE CUTTER AZR02-150

Blade Diameter(mm)	Φ 150
Rated Power Input(W)	1400
No-Load Speed(r/min)	7000
Max. Cutting Depth(mm)	30
Max. Cutting Width(mm)	32
Net Weight(kg)	6.3



ELECTRIC GROOVE CUTTER AZR180

Blade Diameter(mm)	Φ 180
Rated Power Input(W)	1900
No-Load Speed(r/min)	5000
Max. Cutting Depth(mm)	58
Max. Cutting Width(mm)	50
Net Weight(kg)	8.0



ELECTRIC DRILL AJZ6A

Rated Power Input(W)	230
No-Load Speed(r/min)	3800
Max. Drilling Capacity	
Steel(mm)	Φ6.5
Wood(mm)	Φ9
Net Weight(kg)	1.2



Optional: Keyless Chuck

ELECTRIC DRILL AJZ02-6A

Rated Power Input(W)	230
No-Load Speed(r/min)	0-3800
Max. Drilling Capacity	
Steel(mm)	Φ6.5
Wood(mm)	Φ9
Net Weight(kg)	1.2



Optional: Keyless Chuck

ELECTRIC DRILL AJZ10A

Rated Power Input(W)	300
No-Load Speed(r/min)	0-3000
Max. Drilling Capacity	
Steel(mm)	Φ10
Wood(mm)	Φ18
Net Weight(kg)	1.5



ELECTRIC DRILL AJZ02-10A

Rated Power Input(W)	430
No-Load Speed(r/min)	1200
Max. Drilling Capacity	
Steel(mm)	Φ10
Wood(mm)	Φ20
Net Weight(kg)	2.2



ELECTRIC DRILL AJZ03-10A

Rated Power Input(W)	300
No-Load Speed(r/min)	3000
Max.Drilling Capacity	
Steel(mm)	Φ10
Wood(mm)	Φ18
Net Weight(kg)	1.5



ELECTRIC DRILL AJZ04-10A

Rated Power Input(W)	430
No-Load Speed(r/min)	0-1200
Max.Drilling Capacity	
Steel(mm)	Φ10
Wood(mm)	Φ20
Net Weight(kg)	2.1



ELECTRIC DRILL AJZ05-13

Rated Power Input(W)	500
No-Load Speed(r/min)	0-2600
Max.Drilling Capacity	
Steel(mm)	Φ13
Wood(mm)	Φ25
Net Weight(kg)	1.7



ELECTRIC DRILL AJZ05-10A

Rated Power Input(W)	500
No-Load Speed(r/min)	0-2600
Max.Drilling Capacity	
Steel(mm)	Φ10
Wood(mm)	Φ25
Net Weight(kg)	1.7



ANGLE DRILL AJZ06-10

Rated Power Input(W)	380
No-Load Speed(r/min)	0-1400
Max.Drilling Capacity	
Steel(mm)	Φ10
Wood(mm)	Φ15
Net Weight(kg)	1.9



ELECTRIC DRILL AJZ05-10A

Rated Power Input(W)	500
No-Load Speed(r/min)	0-2600
Max.Drilling Capacity	
Steel(mm)	Φ10
Wood(mm)	Φ25
Net Weight(kg)	1.7



ELECTRIC DRILL AJZ07-10

Rated Power Input(W)	500
No-Load Speed(r/min)	0-1750
Max.Drilling Capacity	
Steel(mm)	Φ10
Wood(mm)	Φ25
Net Weight(kg)	1.5



ELECTRIC DRILL AJZ07-10

Rated Power Input(W)	500
No-Load Speed(r/min)	0-1750
Max.Drilling Capacity	
Steel(mm)	Φ10
Wood(mm)	Φ25
Net Weight(kg)	1.5



ELECTRIC DRILL AJZ06-13

Rated Power Input(W)	710
No-Load Speed(r/min)	0-2800
Max.Drilling Capacity	
Steel(mm)	Φ 13
Wood(mm)	Φ 20
Net Weight(kg)	1.7



ELECTRIC DRILL AJZ08-10

Rated Power Input(W)	250
No-Load Speed(r/min)	0-850
Max.Drilling Capacity	
Steel(mm)	Φ 10
Wood(mm)	Φ20
Net Weight(kg)	1.2



ELECTRIC DRILL AJZ13

Rated Power Input(W)	500
No-Load Speed(r/min)	1200
Max.Drilling Capacity	
Steel(mm)	Φ13
Wood(mm)	Φ20
Net Weight(kg)	2.3



ELECTRIC DRILL AJZ16A

Rated Power Input(W)	800
No-Load Speed(r/min)	680
Max.Drilling Capacity	
Steel(mm)	Φ16
Wood(mm)	Φ36
Net Weight(kg)	3.2



ELECTRIC DRILL AJZ02-13

Rated Power Input(W)	500
No-Load Speed(r/min)	0-1200
Max.Drilling Capacity	
Steel(mm)	Φ13
Wood(mm)	Φ20
Net Weight(kg)	2.4



ELECTRIC DRILL AJZ03-16A

Rated Power Input(W)	1010
No-Load Speed(r/min)	620
Max.Drilling Capacity	
Steel(mm)	Φ16
Wood(mm)	Φ36
Net Weight(kg)	3.2



ELECTRIC DRILL AJZ03-13B

Rated Power Input(W)	800
No-Load Speed(r/min)	850
Max.Drilling Capacity	
Steel(mm)	Φ13
Wood(mm)	Φ36
Net Weight(kg)	2.9



ELECTRIC MIXER AQU06-160

Rated Power Input(W)	2000
No-Load Speed(r/min)	500
Net Weight(kg)	5.1



ELECTRIC MIXER AQU160 /AQU160B

Rated Power Input(W)	800
No-Load Speed(r/min)	680
Net Weight(kg)	2.4



ELECTRIC MIXER AQU02-160

Rated Power Input(W)	1010
No-Load Speed(r/min)	620
Dia. Of Mixing Wheel(mm)	φ 160
Net Weight(kg)	3.5



ELECTRIC MIXER AQU04-160

Rated Power Input(W)	900
No-Load Speed(r/min)	500
Net Weight(kg)	2.5



ELECTRIC MIXER AQU05-160

Rated Power Input(W)	1800
No-Load Speed(r/min)	2000
Net Weight(kg)	5.5



ELECTRIC IMPACT DRILL AZJ10

Rated Power Input(W)	500
No-Load Speed(r/min)	0-2500
Rated Impacting Frequency(.../min)	0-37500
Max.Drilling Capacity	
Steel(mm)	Φ8
Concrete(mm)	Φ10
Wood(mm)	Φ20
Net Weight(kg)	1.6



ELECTRIC IMPACT DRILL AZJ13

Rated Power Input(W)	500
No-Load Speed(r/min)	0-1200
Rated Impacting Frequency(.../min)	0-15600
Max.Drilling Capacity (mm)	φ 13
Net Weight(kg)	2.5



ELECTRIC IMPACT DRILL AZJ02-13

Rated Power Input(W)	500
No-Load Speed(r/min)	0-2600
Rated Impacting Frequency(.../min)	0-41600
Max.Drilling Capacity	
Steel(mm)	Φ10
Concrete(mm)	Φ13
Wood(mm)	Φ25
Net Weight(kg)	2.0



ELECTRIC IMPACT DRILL AZJ03-13

Rated Power Input(W)	500
No-Load Speed(r/min)	0-1200
Rated Impacting Frequency(.../min)	0-15600
Max.Drilling Capacity (mm)	Φ 13
Net Weight(kg)	2.5



ELECTRIC IMPACT DRILL AZJ16

Rated Power Input(W)	710
No-Load Speed(r/min)	0-3000
Max.Drilling Capacity	
Steel(mm)	Φ 13
Concrete(mm)	Φ 16
Wood(mm)	Φ 30
Net Weight(kg)	2



ELECTRIC IMPACT DRILL AZJ20

Rated Power Input (W)	720
Max.Drilling Capacity	Low Speed High Speed
Steel(mm)	Φ13 Φ 8
Concrete(mm)	Φ 20
Wood(mm)	Φ40 Φ 25
No-Load Speed(r/min)	0-1150 0-2800
Rated Impacting Frequency(.../min)	0-23000 0-56000
Net Weight(kg)	2.4



ELECTRIC IMPACT DRILL(TOOL KIT) AZJ04-13

Rated Power Input(W)	500
No-Load Speed(r/min)	0-2600
Rated Impacting Frequency(.../min)	0-41600
Max.Drilling Capacity	
Steel(mm)	Φ10
Concrete(mm)	Φ13
Wood(mm)	Φ25



SDS-plus

ELECTRIC ROTARY HAMMER AZC20

Rated Power Input(W)	600
No-Load Speed(r/min)	0-900
Max.Drilling Capacity (mm)	Φ 20
Net Weight(kg)	3.8



SDS-plus

2 Drill & Hammer
HAMMER DRILL

AZC02-20

AZC03-20

Rated Power Input(W)	500
No-Load Speed (r/min)	0-850/850
Max. Drilling Capacity	Φ20
Net Weight(kg)	2.9/2.8



SDS-plus & SDS-square

ELECTRIC ROTARY HAMMER AZC26

Rated Power Input(W)	750
No-Load Speed(r/min)	500
Max.Drilling Capacity	Φ 26
Net Weight(kg)	5.0



SDS-plus & SDS-square

ELECTRIC ROTARY HAMMER AZC02-26

Rated Power Input(W)	750
No-Load Speed(r/min)	0-500
Max.Drilling Capacity	Φ 26
Net Weight(kg)	5.0



SDS-square

ELECTRIC ROTARY HAMMER
AZC30

Rated Power Input(W)	960
No-Load Speed(r/min)	1000
Max.Drilling Capacity (mm)	Φ30
Net Weight(kg)	5.0



SDS-square/SDS-plus



Hammer & Demolition

ELECTRIC ROTARY HAMMER
AZC03-26 / AZC03-26B

Rated Power Input(W)	750
No-Load Speed(r/min)	500
Rated Impacting Frequency(.../min)	3200
Max.Drilling Capacity (mm)	Φ26
Net Weight(kg)	5.0



SDS-square



Hammer & Demolition

ELECTRIC ROTARY HAMMER
AZC02-30

Rated Power Input(W)	960
No-Load Speed(r/min)	1000
Max.Drilling Capacity (mm)	Φ30
Net Weight(kg)	5.0



SDS-plus



Drill & Hammer & Demolition

HAMMER DRILL
AZC05-26

Rated Power Input(W)	720
No-Load Speed(r/min)	0-1200
Rated Impacting Frequency(.../min)	0-4000
Max.Drilling Capacity (mm)	Φ26
Net Weight(kg)	2.93



SDS-square

ELECTRIC ROTARY HAMMER
AZC28

Rated Power Input(W)	960
No-Load Speed(r/min)	1000
Rated Impacting Frequency(.../min)	5000
Max.Drilling Capacity (mm)	Φ28
Net Weight(kg)	5.0



SDS-square & SDS-plus



Hammer & Demolition

ELECTRIC ROTARY HAMMER
AZC04-30

Rated Power Input(W)	960
No-Load Speed(r/min)	1000
Max.Drilling Capacity (mm)	Φ30
Net Weight(kg)	5.2



SDS-square



Hammer & Demolition

ELECTRIC ROTARY HAMMER
AZC02-28

Rated Power Input(W)	960
No-Load Speed(r/min)	1000
Max.Drilling Capacity (mm)	Φ28
Net Weight(kg)	5.0



SDS-hex 13mm

ELECTRIC ROTARY HAMMER AXC38

Rated Power Input(W)	800
No-Load Speed(r/min)	400
Max.Drilling Capacity (mm)	Φ38
Net Weight(kg)	7.6



SDS-hex 13mm

ELECTRIC ROTARY HAMMER AXC02-38

Rated Power Input(W)	1050
No-Load Speed(r/min)	400
Max.Drilling Capacity(mm)	Φ38
Net Weight(kg)	7.5



SDS-max
2 Hammer & Demolition



ELECTRIC ROTARY HAMMER AXC03-38

Rated Power Input(W)	1100
No-Load Speed(r/min)	320
Max.Drilling Capacity (mm)	Φ38
Rated Impacting Frequency(.../min)	2900
Net Weight(kg)	6.2



DIE GRINDER ASJ02-10

Rated Power Input(W)	105
Rated Speed(r/min)	30000
Max.Grinding Wheel Diameter(mm)	Φ10
Net Weight(kg)	0.8




DIE GRINDER ASJ03-10

Rated Power Input(W)	105
Rated Speed(r/min)	14000-30000
Max.Grinding Wheel Diameter(mm)	Φ10
Net Weight(kg)	0.6



DIE GRINDER ASJ25/ASJ25B

Rated Power Input(W)	240
Rated Speed(r/min)	26000
Max.Grinding Wheel Diameter(mm)	Φ25
Net Weight(kg)	1.2

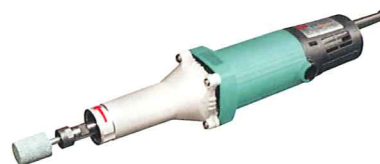

DIE GRINDER ASJ02-25

Rated Power Input(W)	400
Rated Speed(r/min)	27000
Max.Grinding Wheel Diameter(mm)	Φ25
Net Weight(kg)	1.8



**DIE GRINDER
ASJ03-25**

Rated Power Input(W)	400
Rated Speed(r/min)	27000
Max.Grinding Wheel Diameter(mm)	Φ25
Net Weight(kg)	1.8



**DIE GRINDER
ASJ04-25**

Rated Power Input(W)	260
Rated Speed(r/min)	26700
Max.Grinding Wheel Diameter(mm)	Φ25
Net Weight(kg)	1.3



**DIE GRINDER
ASJ05-25**

Rated Power Input(W)	550
Rated Speed(r/min)	9000-26700
Max.Grinding Wheel Diameter(mm)	Φ25
Net Weight(kg)	1.6



**DIE GRINDER
ASJ06-25**

Rated Power Input(W)	750
Rated Speed(r/min)	3800-8300
Max.Grinding Wheel Diameter(mm)	Φ25
Net Weight(kg)	1.6



**WELD JOINT BEVELLER
AJB3**

Rated Power Input(W)	800
No-Load Speed(r/min)	9000
Blade Size(mm)	□9.5x3.5x φ 4.2
Net Weight(kg)	2.5



**WELD JOINT BEVELLER
AJB02-3**

Rated Power Input(W)	800
No-Load Speed(r/min)	9000
Blade Size(mm)	□9.5x3.5x φ 4.2
Net Weight(kg)	2.3



**TAPPER
AJS10**

Rated Power Input(W)	500
No-Load Speed(r/min)	
Forward(r/min)	0-580
Backward(r/min)	0-1000
Tapping Capacity	
Cast iron, Aluminum or copper(mm)	M4~M12
Steel(mm)	M4~M10
Net Weight(kg)	2.5



**TAPPER
AJS02-10**

Rated Power Input(W)	500
No-Load Speed(r/min)	
Forward(r/min)	0-580
Backward(r/min)	0-1000
Tapping Capacity	
Cast iron, Aluminum or copper(mm)	M4~M12
Steel(mm)	M4~M10
Net Weight(kg)	2.6



NEW

**ORBITAL SANDER
ASB104**

Rated Power Input(W)	200
Orbits Frequency(. . . /min)	13000
Pad Size (mm)	70×104
Net Weight(kg)	1.2



ORBITAL SANDER
ASB100/ASB100B

Rated Power Input(W)	150/180
Orbits Frequency(.../min)	12000/13000
Pad Size(mm)	100×110
Net Weight(kg)	1.3



ORBITAL SANDER
ASB02-100

Rated Power Input(W)	200
Orbits Frequency(.../min)	14000
Pad Size(mm)	100×110
Net Weight(kg)	1.3



ORBITAL SANDER
ASB234

Rated Power Input(W)	520
Orbits Frequency(.../min)	10000
Pad Size(mm)	114×234
Net Weight(kg)	2.9



ORBITAL SANDER
ASB03-100

Rated Power Input(W)	240
Orbits Frequency(.../min)	14000
Pad Size(mm)	100×110
Net Weight(kg)	1.2



NEW

ORBITAL SANDER
ASB02-234

Rated Power Input(W)	330
Orbits Frequency(.../min)	10000
Pad Size(mm)	114×234
Net Weight(kg)	2.9



NEW

ORBITAL SANDER
ASB04-100

Rated Power Input(W)	240
Orbits Frequency(.../min)	14000
Pad Size(mm)	100×110
Net Weight(kg)	1.2



ORBITAL SANDER
ASB185/ASB185B

Rated Power Input(W)	160/200
Orbits Frequency(.../min)	10000/11000
Pad Size(mm)	93×185
Net Weight(kg)	1.7/1.6



NEW

ORBITAL SANDER
ASB02-234B

Rated Power Input(W)	330
Orbits Frequency(.../min)	7500
Pad Size(mm)	114×234
Net Weight(kg)	2.9



ORBITAL SANDER
ASB02-185

Rated Power Input(W)	220
Orbits Frequency(.../min)	12000
Pad Size(mm)	93×185
Net Weight(kg)	1.6



**BELT SANDER
AST9 x 533**

Rated Power Input(W)	500
Belt Speed(m/s)	5-28
Belt Size(mm)	9 x 533
Net Weight(kg)	1.5



**BELT SANDER
AST533**

Rated Power Input(W)	550
Belt Speed(m/s)	3.3-16.6
Belt Size(mm)	30x533
Net Weight(kg)	2.1



**BELT SANDER
AST610**

Rated Power Input(W)	1200
Belt Speed(m/min)	500
Belt Size(mm)	100x610
Net Weight(kg)	5.8



**GRINDING POLISHER
ASN100**

Rated Power Input(W)	1400
Rated Speed(r/min)	690-3800
Wheel Size(mm)	120x100
Net Weight(kg)	4.7



**ELECTRIC PLANER
AMB82**

Max. Planing Width(mm)	82
Max. Planing Depth(mm)	1
Rated Power Input(W)	500
No-Load Speed(r/min)	16000
Net Weight(kg)	2.9



**ELECTRIC PLANER
AMB02-82**

Max. Planing Width(mm)	82
Max. Planing Depth(mm)	1
Rated Power Input(W)	500
No-Load Speed(r/min)	15000
Net Weight(kg)	2.6



NEW

**ELECTRIC PLANER
AMB03-82**

Max. Planing Width(mm)	82
Hole Planing Depth(mm)	1
Rated Power Input(W)	500
No-Load Speed(r/min)	16000
Net Weight(kg)	2.9



NEW

**ELECTRIC PLANER
AMB110**

Max. Planing Width(mm)	110
Hole Planing Depth(mm)	2
Rated Power Input(W)	840
No-Load Speed(r/min)	16500
Net Weight(kg)	4.2



**WOOD ROUTER
AMR8**

Rated Power Input(W)	900
Max.Milling Cutter Diameter(mm)	φ 8
No-Load Speed(r/min)	26000
Net Weight(kg)	2.95



**WOOD ROUTER
AMR12**

Rated Power Input(W)	1600
Max.Milling Cutter Diameter(mm)	φ 12/ 12. 7
No-Load Speed(r/min)	23000
Net Weight(kg)	6. 0



**WOOD ROUTER
AMR02-12**

Rated Power Input(W)	1650
Max.Milling Cutter Diameter(mm)	φ 12/12. 7
No-Load Speed(r/min)	22000
Net Weight(kg)	6. 0



**WOOD ROUTER
AMR03-12**

Rated Power Input(W)	1050
Max.Milling Cutter Diameter(mm)	φ 12/12. 7
No-Load Speed(r/min)	23000
Net Weight(kg)	3. 5



**WOOD ROUTER
AMR04-12**

Rated Power Input(W)	1650
Max.Milling Cutter Diameter(mm)	φ 12/ 12. 7
No-Load Speed(r/min)	22000
Net Weight(kg)	6. 0



**WOOD ROUTER
AMR05-12**

Rated Power Input(W)	1240
Max.Milling Cutter Diameter(mm)	φ 12/12. 7
No-Load Speed(r/min)	24000
Net Weight(kg)	4. 6



**JIG SAW
AMQ65**

Rated Power Input(W)	600
No-Load Strokes(.../min)	500-3000
Bevel Cutting Angle(Left/Right)	0-45°
Max.Cutting Capacity	
Steel(mm)	10
Wood(mm)	65
Net Weight(kg)	2. 5



**JIG SAW
AMQ85**

Rated Power Input(W)	580
No-Load Strokes(.../min)	500-3100
Bevel Cutting Angle(Left/Right)	0-45°
Max.Cutting Capacity	
Steel(mm)	10
Wood(mm)	85
Net Weight(kg)	2. 7



**DISC SANDER
ASA150**

Rated Power Input(W)	405
Rated Speed(r/min)	4700
Grinding Disc Diameter	Φ 150
Net Weight(kg)	1.6



**SANDER POLISHER
ASP180**

Rated Power Input(W)	750
Rated Speed(r/min)	2500-3400
Wheel Size(mm)	Φ 180
Net Weight(kg)	3.6



**SANDER POLISHER
ASP02-180**

Rated Power Input(W)	570
Rated Speed(r/min)	1000-2400
Wheel Size(mm)	Φ 180
Net Weight(kg)	3.3



**SANDER POLISHER
ASP03-180**

Rated Power Input(W)	1020
Rated Speed(r/min)	1000-3600
Wheel Size(mm)	Φ 180
Net Weight(kg)	3.6



**SANDER POLISHER
ASP04-180**

Rated Power Input(W)	1400
Rated Speed(r/min)	690-3800
Wheel Size(mm)	Φ 180
Net Weight(kg)	3.4



**TRIMMER
AMP02-6**

Rated Power Input(W)	350
Rated Speed(r/min)	30000
Max.Milling Cutter Diameter(mm)	6/6.35
Net Weight(kg)	1.8



**TRIMMER
AMP03-6**

Rated Power Input(W)	530
Rated Speed(r/min)	30000
Max.Milling Cutter Diameter(mm)	6/6.35
Net Weight(kg)	1.8



TRIMMER AMP04-6

Rated Power Input(W)	550
Rated Speed(r/min)	30000
Max.Milling Cutter Diameter(mm)	6/6.35
Net Weight(kg)	1.6



RECIPROCATING SAW AJF30

Rated Power Input(W)	590
No-Load Strokes(.../min)	0-2300
Length Of Strokes(mm)	30
Max.Cutting Capacity	
Steel(mm)	90
Wood(mm)	90
Net Weight(kg)	3.2



ELECTRIC CHAIN SAW AML300

No-Load Speed(m/min)	400
Rated Power Input(W)	1300
Max.Length Of Guide Bar(mm)	300
Net Weight(kg)	5.3



ELECTRIC CHAIN SAW AML405 / AML02-405

No-Load Speed(m/min)	400
Rated Power Input(W)	1300
Max.Length Of Guide Bar(mm)	405
Net Weight(kg)	5.6



ELECTRIC CHAIN SAW AML02-300 / AML350

No-Load Speed(m/min)	800
Rated Power Input(W)	1800
Max.Length Of Guide Bar(mm)	300/350
Net Weight(kg)	4.5



ELECTRIC CHAIN SAW AML04-405 / AML450

No-Load Speed(m/min)	800
Rated Power Input(W)	1800
Max.Length Of Guide Bar(mm)	405/450
Net Weight(kg)	4.5



ELECTRIC CUT-OFF MACHINE
AJG02-355

Wheel Size(mm)	355 × 3 × 25.4
Rated Power Input(W)	2000
No-Load Speed(r/min)	3800
Net Weight(kg)	16



ELECTRIC CUT-OFF MACHINE
AJG03-355

Wheel Size(mm)	355 × 3 × 25.4
Rated Power Input(W)	2100
No-Load Speed(r/min)	3900
Net Weight(kg)	16



ELECTRIC CUT-OFF MACHINE
AJG04-355

Wheel Size(mm)	355 × 3 × 25.4
Rated Power Input(W)	2000
No-Load Speed(r/min)	3800
Net Weight(kg)	14



380V~

ELECTRIC CUT-OFF MACHINE
A3JG400

Wheel Size(mm)	400 × 32 × 3.2
Rated Power Input(W)	3000
No-Load Speed(r/min)	2800
Net Weight(kg)	58



380V~

NEW

ELECTRIC CUT-OFF MACHINE
A3JG03-400

Wheel Size(mm)	400 × 32 × 3.2
Rated Power Input(W)	3000
No-Load Speed(r/min)	2800
Net Weight(kg)	63



380V~

NEW

ELECTRIC CUT-OFF MACHINE
A3JG05-400

Wheel Size(mm)	400 × 32 × 3.2
Rated Power Input(W)	3000
No-Load Speed(r/min)	2840
Net Weight(kg)	66.0



NEW

DRYWALL SANDER
ASF225

Rated Power Input(W)	605
Rated Speed(r/min)	800-1500
Grinding Disc Diameter(mm)	φ225
Net Weight(kg)	4.7



SDS-square & SDS-plus
PERCUSSION HAMMER
AZG4

Rated Power Input(W)	620
Rated Impacting Frequency(.../min)	3200
Net Weight(kg)	4.1



SDS-hex 17mm

PERCUSSION HAMMER
AZG04-6

Rated Power Input(W)	900
Rated Impacting Frequency(.../min)	2900
Net Weight(kg)	6.8



SDS-hex 17mm

PERCUSSION HAMMER
AZG6 /AZG6S

Rated Power Input(W)	900
Rated Impacting Frequency(.../min)	2900
Net Weight(kg)	6.8



SDS-hex 17mm

PERCUSSION HAMMER
AZG05-6

Rated Power Input(W)	1050
Rated Impacting Frequency(.../min)	3000
Net Weight(kg)	5.5



SDS-max

PERCUSSION HAMMER
AZG10

Rated Power Input(W)	1500
Rated Impacting Frequency(.../min)	900-1890
Net Weight(kg)	10.4



SDS-hex 30mm

PERCUSSION HAMMER
AZG15

Rated Power Input(W)	1240
Rated Impacting Frequency(.../min)	1400
Net Weight(kg)	16



SDS-hex 30mm

PERCUSSION HAMMER AZG02-15

Rated Power Input(W)	1010
Rated Impacting Frequency(.../min)	1400
Net Weight(kg)	16



SDS-hex 30mm

PERCUSSION HAMMER AZG04-15

Rated Power Input(W)	1500
Rated Impacting Frequency(.../min)	1450
Net Weight(kg)	14.3



ELECTRIC SHEAR AJJ25

Rated Power Input(W)	710
Max.Cutting Capacity	
Mild Steel(mm)	2.5
Hard Steel Plate(mm)	2.0
Stainless(mm)	2.0
Aluminium Sheet(mm)	3.2
Min.Cutting Radius(mm)	45
Rated Strokes(.../min)	2200
Net Weight(kg)	2.3



ELECTRIC SHEAR AJJ32

Rated Power Input(W)	620
Cutting Capacity	
Mild Steel(mm)	3.2
Stainless(mm)	2.5
Min.Cutting Radius(mm)	50
Rated Impacting Frequency(.../min)	1600
Net Weight(kg)	3.8



SCREWDRIVER APL6

Rated Power Input(W)	710
No-Load Speed(r/min)	0-4300
Max. Screw Dia.(mm)	6
Net Weight(kg)	1.6



IMPACT SCREWDRIVER APL8

Rated Power Input(W)	300
No-Load Speed(r/min)	0-2200
Rated Impacting Frequency(.../min)	0-3000
Max.Fastening Torque(N.m)	98
Net Weight(kg)	1.3



ELECTRIC WRENCH APB12

Rated Power Input(W)	300
No-Load Speed(r/min)	1800
Rated Impacting Frequency(.../min)	2000
Capacities(Bolt Size)(mm)	M8-M12
Square Drive(mm)	12.7x12.7
Max.Fastening Torque(N.m)	188
Net Weight(kg)	2.1



ELECTRIC NIBBLER AJH32

Rated Power Input(W)	620
No-Load Strokes(.../min)	1300
Max.Cutting Capacity	
Mild Steel(mm)	3.2
Stainless(mm)	2.5
Min.Cutting Radius	
Inner Dia.(mm)	120
Outer Dia.(mm)	128
Net Weight(kg)	3.8



SHEAR WRENCH APB24E

Rated Power Input(W)	1050
No-Load Speed(r/min)	18
Max.Fastening Torque(N.m)	1100
Net Weight(kg)	8.0



ELECTRIC WRENCH APB20C

Rated Power Input(W)	340
No-Load Speed(r/min)	1700
Rated Impacting Frequency(.../min)	2000
Capacities(Bolt Size)(mm)	M12-M20
Square Drive(mm)	12.7x12.7
Max.Fastening Torque(N.m)	294
Net Weight(kg)	3.2



ELECTRIC WRENCH APB22C

Rated Power Input(W)	620
No-Load Speed(r/min)	1700
Rated Impacting Frequency(.../min)	1600
Capacities(Bolt Size)(mm)	M16-M22
Square Drive(mm)	19x19
Max.Fastening Torque(N.m)	588
Net Weight(kg)	5



ELECTRIC WRENCH APB30

Rated Power Input(W)	1050
No-Load Speed(r/min)	1400
Rated Impacting Frequency(.../min)	1500
Capacities(Bolt Size)(mm)	M22-M30
Square Drive(mm)	25.4 x 25.4
Fastening Torque Range(N.m)	400-900
Net Weight(kg)	10



DIAMOND DRILL WITH WATER SOURCE AZZ90

Rated Power Input(W)	1350
No-Load Speed(r/min)	0-2300
Max.Drilling Capacity(mm)	Φ90
Net Weight(kg)	4.4



DIAMOND DRILL WITH WATER SOURCE AZZ03-110

Rated Power Input(W)	1800
No-Load Speed(r/min)	1900
Max.Drilling Capacity	
Concrete(mm)	Φ 110
Brick wall(mm)	Φ 160
Net Weight(kg)	5.3



DIAMOND DRILL WITH WATER SOURCE AZZ02-160

Rated Power Input(W)	1800
No-Load Speed(r/min)	1900
Max.Drilling Capacity(mm)	Φ160
Net Weight(kg)	5.2



NEW

DIAMOND DRILL WITH WATER SOURCE AZK150

Rated Power Input(W)	2000
No-Load Speed(r/min)	1900
Max.Drilling Capacity(mm)	Φ150
Net Weight(kg)	7.2

With Pipe Laying Stand



NEW

DIAMOND DRILL WITH WATER SOURCE AZZ180

Rated Power Input(W)	2000
No-Load Speed(r/min)	1900
Max.Drilling Capacity(mm)	Φ180
Net Weight(kg)	7.0



NEW

DIAMOND DRILL WITH WATER SOURCE AZZ02-180

Rated Power Input(W)	2000
No-Load Speed(r/min)	1900
Max.Drilling Capacity(mm)	Φ180
Net Weight(kg)	6.2



DIAMOND DRILL WITH WATER SOURCE

AZZ190

Rated Power Input(W)	1800
No-Load Speed(r/min)	Max. Drilling Capacity(mm)
Gear1 750r/min	Brick Wall 110-190mm
Gear2 1650r/min	Brick Wall 65-110mm
Gear3 3300r/min	Brick Wall 15-65mm
Net Weight(kg)	6.0



DIAMOND DRILL WITH WATER SOURCE

AZZ130/AZZ02-130

Rated Power Input(W)	1350/1800
No-Load Speed(r/min)	1100/1200
Max. Drilling Capacity(mm)	φ 130
Net Weight(kg)	12/11.6



DIAMOND DRILL WITH WATER SOURCE

AZZ03-160

Rated Power Input(W)	1800
No-Load Speed(r/min)	1900
Max. Drilling Capacity(mm)	Φ 160
Net Weight(kg)	11.7



DIAMOND DRILL WITH WATER SOURCE

AZZ200

Rated Power Input(W)	3300
No-Load Speed(r/min)	500
Max. Drilling Capacity(mm)	Φ200
Net Weight(kg)	22



DIAMOND DRILL WITH WATER SOURCE

AZZ02-200

Rated Power Input(W)	3500
No-Load Speed(r/min)	700
Max. Drilling Capacity(mm)	Φ200
Net Weight(kg)	25



DIAMOND DRILL WITH WATER SOURCE

AZZ03-200

Rated Power Input(W)	3800
No-Load Speed(r/min)	700
Max. Drilling Capacity(mm)	φ 200
Net Weight(kg)	25.0



DIAMOND DRILL WITH WATER SOURCE

AZZ250

Rated Power Input(W)	3800
No-Load Speed(r/min)	580
Max. Drilling Capacity(mm)	φ 250
Net Weight(kg)	25.0



DIAMOND DRILL WITH WATER SOURCE

AZZ02-250

Rated Power Input(W)	3800
No-Load Speed(r/min)	390/1100
Max. Drilling Capacity(mm)	φ 250
Net Weight(kg)	25.0



ELECTRIC CIRCULAR SAW AMY185

Rated Power Input(W)	1100
No-Load Speed(r/min)	4900
Max.Cutting Capacity(mm)	64
Max.Cutting Angle	45°
Net Weight(kg)	5.0



ELECTRIC CIRCULAR SAW AMY02-185

Rated Power Input(W)	1100
No-Load Speed(r/min)	5600
Max.Cutting Capacity(mm)	64
Max.Cutting Angle	45°
Net Weight(kg)	3.6



ELECTRIC CIRCULAR SAW AMY03-185

Rated Power Input(W)	1400
No-Load Speed(r/min)	5300
Max.Cutting Capacity(mm)	64
Max.Cutting Angle	45°
Net Weight(kg)	5.0



ELECTRIC CIRCULAR SAW AMY235

Rated Power Input(W)	1520
No-Load Speed(r/min)	4100
Max.Cutting Capacity(mm)	84
Max.Cutting Angle	45°
Net Weight(kg)	7.5





ELECTRIC CIRCULAR SAW AMY02-235

Rated Power Input(W)	2000
No-Load Speed(r/min)	4100
Max.Cutting Capacity(mm)(90°)	85
(45°)	60
Max. Bevel Cutting Angle(°)	50
Net Weight(kg)	6.5



ELECTRIC MITRE SAW AJX03-255

Rated Power Input(W)	1650
No-Load Speed(r/min)	6000
Blade Diameter(mm)	255
Net Weight(kg)	12.0



ELECTRIC MITRE SAW AJX255

Rated Power Input(W)	1650
No-Load Speed(r/min)	4600
Blade Diameter(mm)	255
Net Weight(kg)	12



ELECTRIC MITRE SAW AJX355

Rated Power Input(W)	1380
No-Load Speed(r/min)	3200
Blade Diameter(mm)	355
Net Weight(kg)	34.0



DUST-FREE SAW AFF150

Rated Power Input(W)	1100
No-Load Speed(r/min)	4900
Blade Diameter(mm)	105-150
Fan Rated Power(W)	1000
Maximum Vacuum Degree(Pa)	21000
Net Weight(kg)	10.8



VACUUM CLEANER AVC15

Rated Power Input(W)	1200
Capacity(L)	15
Cooling System	Recycle
Net Weight(kg)	7.6



VACUUM CLEANER AVC30

Rated Power Input(W)	1200
Capacity(L)	30
Cooling System	Recycle
Net Weight(kg)	8.8



VACUUM CLEANER AVC30B

Rated Power Input(W)	1200
Capacity(L)	30
Cooling System	Recycle
Net Weight(kg)	8.8



VACUUM CLEANER AVC60

Rated Power Input(W)	2300
Capacity(L)	60
Cooling System	Recycle
Net Weight(kg)	24.0



VACUUM CLEANER AVC80

Rated Power Input(W)	3200
Capacity(L)	80
Cooling System	Recycle
Net Weight(kg)	26.5



AIRLESS HIGH-PRESSURE SPRAYING UNIT

APWG3.5

Rated Power Input(W)	2200
No-Load Speed(r/min)	1440
The Maximum Operating Pressure	20/3000 PSI
Flow (L/min)	3.5
Net Weight(kg)	37



VACUUM CLEANER AVC02-80

Rated Power Input(W)	3200
Capacity(L)	80
Cooling System	Recycle
Net Weight(kg)	36.6



BLOWER VACUUM AQF25

Rated Power Input(W)	480
No-Load Speed(r/min)	14000
The Maximum Gas Volume(m ³ /min)	2.5
Net Weight(kg)	1.8



BLOWER VACUUM AQF32

Rated Power Input(W)	680
No-Load Speed(r/min)	8300-16300
The Maximum Gas Volume(m ³ /min)	1.6-3.2
Net Weight(kg)	1.8



HEAT GUN AQB02-1600

Rated Power Input(W)	1600
Temperature	Low Temperature(°C) 50-400
	High Temperature(°C) 50-550
Air Flow	Low Temperature(L/min) 190-210
	High Temperature(L/min) 310-350
Net Weight(kg)	0.8



HEAT GUN AQB2000

Rated Power Input(W)	2000
Temperature	Low Temperature(°C) 50-480
	High Temperature(°C) 50-600
Air Flow	Low Temperature(L/min) 210-250
	High Temperature(L/min) 340-380
Net Weight(kg)	0.8



MAGNETIC DRILL AJC16

Rated Power Input(W)	900
Max. Drilling Capacity(mm)	Φ16
Magnetism(N)	11500
No-Load Speed(r/min)	450
Max. Stroke(mm)	140
Connector	MT2 Shank
Net Weight(kg)	11.5



MAGNETIC DRILL AJC23

Rated Power Input(W)	1500
Max. Drilling Capacity	
Twist Drill Bit(mm)	Φ23
Core Drill Bit(mm)	Φ50
Magnetism(N)	15000
No-Load Speed(r/min)	390
Max. Stroke(mm)	220
Connector	MT2 Shank
Net Weight(kg)	21.0



MAGNETIC DRILL(CORE DRILL) AJC30

Rated Power Input(W)	900
Max. Drilling Capacity(mm)	Φ30
Magnetism(N)	11500
No-Load Speed(r/min)	450
Max. Stroke(mm)	140
Connector	Straight Shank Φ19mm
Net Weight(kg)	11.5



MAGNETIC DRILL AJC32

Rated Power Input(W)	1900
Max. Drilling Capacity(mm)	Φ32
Magnetism(N)	15000
No-Load Speed(r/min)	170
Max. Stroke(mm)	225
Connector	MT4 Shank
Net Weight(kg)	45.0



MAGNETIC DRILL AJC49

Rated Power Input(W)	2200
Max. Drilling Capacity(mm)	Φ49
Magnetism(N)	16500
No-Load Speed(r/min)	125
Max. Stroke(mm)	225
Connector	MT4 Shank
Net Weight(kg)	45.0

NEW



INFRARED THERMOMETER AFF6520A

Infrared Temperature(°C)	-20~300
Distance	D:S 10:1
Emissivity	0.95
Power Supply	1.5V×2
Net Weight(g)	135

NEW



INFRARED THERMOMETER AFF6541

Infrared Temperature(°C)	-50~760
Contact Temperature(°C)	-50~300
Distance	D:S 30:1
Emissivity	0.95
Resolution(°C)	±0.1
Power Supply	9V
Net Weight(g)	223

NEW



MULTI-DETECTOR AFF6906

Detection Depth(mm)	30
Stud/Metal Nails	50
Metal Pipes	70
AC Voltage(50-600V)	0~50
Working Temperature(°C)	20~60
Optimum Humidity(%)	9V
Power Supply	174
Net Weight(g)	



LASER LEVEL AFF11/AFF11B

Laser Diode(nm)	635
Centering Laser Diode(mm)	650
Vertical Accuracy	5m±1mm
Levelling Accuracy	5m±1mm
Auto-levelling Range	±3°
Width of Laser Line	2mm at distance of 5m
Power Supply	3×1.5VLR6(AA)
Operating Temperature	-10°C~45°C
Laser Class	2



LASER LEVEL AFF03-11

Laser Diode(nm)	635
Centering Laser Diode(mm)	650
Vertical Accuracy	5m±1mm
Levelling Accuracy	5m±1mm
Auto-levelling Range	±3°
Width of Laser Line	2mm at distance of 5m
Power Supply	3×1.5VLR6(AA)
Operating Temperature	-10°C~45°C
Laser Class	2



LASER LEVEL AFF21/AFF21B

Laser Diode(nm)	635
Centering Laser Diode(mm)	650
Vertical Accuracy	5m±1mm
Levelling Accuracy	5m±1mm
Auto-levelling Range	±3°
Width of Laser Line	2mm at distance of 5m
Power Supply	3×1.5VLR6(AA)
Operating Temperature	-10°C~45°C
Laser Class	2



LASER LEVEL AFF03-21

Laser Diode(nm)	635
Centering Laser Diode(mm)	650
Vertical Accuracy	5m±1mm
Levelling Accuracy	5m±1mm
Auto-levelling Range	±3°
Width of Laser Line	2mm at distance of 5m
Power Supply	3×1.5VLR6(AA)
Operating Temperature	-10°C~45°C
Laser Class	2



LASER LEVEL AFF41/AFF41B

Laser Diode(nm)	635
Centering Laser Diode(mm)	650
Vertical Accuracy	5m±1mm
Levelling Accuracy	5m±1mm
Auto-levelling Range	±3°
Width of Laser Line	2mm at distance of 5m
Power Supply	3×1.5VLR6(AA)
Operating Temperature	-10°C~45°C
Laser Class	2



LASER LEVEL AFF03-41

Laser Diode(nm)	635
Centering Laser Diode(mm)	650
Vertical Accuracy	5m±1mm
Levelling Accuracy	5m±1mm
Auto-levelling Range	±3°
Width of Laser Line	2mm at distance of 5m
Power Supply	3×1.5VLR6(AA)
Operating Temperature	-10°C~45°C
Laser Class	2



LASER LEVEL AFF360

Laser Diode(nm)	635
Working Range (Diameter)	20m
Automatic level adjustment	≤4S
Levelling Accuracy	1m±0.3mm
Auto-levelling Range	±4°
Power Supply	4x 1.5VLR6(AA)
Operating Temperature	5°C~40°C
Storage temperature	-20~+70°C
Laser Class	2



NEW

GREEN LASER LEVEL AFF04-11

Laser Diode(nm)	532
Centering Laser Diode(mm)	650
Vertical Accuracy	5m±1mm
Levelling Accuracy	5m±1mm
Auto-levelling Range	±3°
Width of Laser Line	2mm at distance of 5m
Power Supply	3x1.5VLR6(AA)
Operating Temperature	0°C~40°C
Laser Class	3A



NEW

GREEN LASER LEVEL AFF04-21/AFF04-41

Laser Diode(nm)	532
Centering Laser Diode(mm)	650
Vertical Accuracy	5m±1mm
Levelling Accuracy	5m±1mm
Auto-levelling Range	±3°
Width of Laser Line	2mm at distance of 5m
Power Supply	3x1.5VLR6(AA)
Operating Temperature	0°C~40°C
Laser Class	3A



NEW

GREEN LASER LEVEL AFF05-11

Laser Diode(nm)	532
Centering Laser Diode(mm)	650
Vertical Accuracy	5m±1mm
Levelling Accuracy	5m±1mm
Auto-levelling Range	±3°
Width of Laser Line	2mm at distance of 5m
Power Supply	3x1.5VLR6(AA)
Operating Temperature	0°C~40°C
Laser Class	3A



LASER DISTANCE METER ADF02-40 / ADF02-60

Measuring Range(m)	0.05-40 / 0.05-60
Accuracy of Measurement(mm)	±2
Laser Diode	635nm, P<1mW
Laser Class	2
Min. Display Unit(mm)	1
Auto Cut-off(without operation for)	180s
Battery Lifetime(Individual Measurements)	5000
Battery Specification	2x1.5v(AA)Alkaline battery
Working Temperature	-10°C~+50°C
Storage Temperature	-25°C~+70°C
Product Size(mm)	118x55x30
Net Weight(g)	120



LASER DISTANCE METER ADF03-40

Measuring Range(m)	0.05-40
Accuracy of Measurement(mm)	±1.5
Laser Diode	620-650nm, P<1mW
Laser Class	2
Min. Display Unit(mm)	1
Auto Cut-off(without operation for)	180s
Battery Lifetime(Individual Measurements)	5000
Battery Specification	2x1.5v(AAA)Alkaline battery
Working Temperature	-10°C~+50°C
Storage Temperature	-25°C~+70°C
Product Size(mm)	122x46x25
Net Weight(g)	105



LASER DISTANCE METER ADF03-60

Measuring Range(m)	0.05-60
Accuracy of Measurement(mm)	±1.5
Laser Diode	620-650nm, P<1mW
Laser Class	2
Min. Display Unit(mm)	1
Auto Cut-off(without operation for)	180s
Battery Lifetime(Individual Measurements)	5000
Battery Specification	2x1.5v(AAA)Alkaline battery
Working Temperature	-10°C~+50°C
Storage Temperature	-25°C~+70°C
Product Size(mm)	122x46x25
Net Weight(g)	105



LASER DISTANCE METER ADF02-80 / ADF02-100

Measuring Range(m)	0.1-80 / 0.1-100
Accuracy of Measurement(mm)	±1.5
Laser Diode	620-650nm, P<1mW
Laser Class	2
Min. Display Unit(mm)	1
Auto Cut-off(without operation for)	150s
Battery Lifetime(Individual Measurements)	4000
Battery Specification	3x1.5V (AAA) Alkaline battery
Working Temperature	0°C~+40°C
Storage Temperature	-20°C~+60°C
Product Size(mm)	120x60x28
Net Weight(g)	180



LASER DISTANCE METER ADF03-80

Measuring Range(m)	0.1-80
Accuracy of Measurement(mm)	±1.5
Laser Diode	620-650nm, P<1mW
Laser Class	2
Min. Display Unit(mm)	1
Auto Cut-off(without operation for)	180s
Battery Lifetime(Individual Measurements)	1000
Battery Specification	2x1.5v(AAA)Alkaline battery
Working Temperature	-10°C~+50°C
Storage Temperature	-25°C~+70°C
Product Size(mm)	122x46x25
Net Weight(g)	105



AIR BRAD NAILER AF30

Working Pressure(Bar)	4-8
Inner Diameter of Air Pipe(mm)	8
Capacity of Magazine(PCS)	100
Nail Type	Brad Nail
Nail Size(mm)	Φ 1.05 x 30(max)
Net Weight(kg)	1.1



AIR BRAD NAILER AF30B

Working Pressure(Bar)	4-8
Inner Diameter of Air Pipe(mm)	8
Capacity of Magazine(PCS)	100
Nail Type	Brad Nail
Nail Size(mm)	Φ 1.05 x 30(max)
Net Weight(kg)	1.1



AIR STAPLER A1022J

Working Pressure(Bar)	4-8
Inner Diameter of Air Pipe(mm)	8
Capacity of Magazine(PCS)	100
Nail Type	Staple
Nail Size(mm)	0.6 x 10 x 22 (max)
Net Weight(kg)	1.1



AIR STAPLER A422J

Working Pressure(Bar)	4-8
Inner Diameter of Air Pipe(mm)	8
Capacity of Magazine(PCS)	100
Nail Type	Staple
Nail Size(mm)	0.6 x 4 x 22 (max)
Net Weight(kg)	1.1



AIR BRAD NAILER AT50DC

Working Pressure(Bar)	4-8
Inner Diameter of Air Pipe(mm)	8
Capacity of Magazine(PCS)	100
Nail Type	Brad Nail
Nail Size(mm)	1.6x1.4x50(max)
Net Weight(kg)	2.1



AIR STAPLER A1013J

Working Pressure(Bar)	4-8
Inner Diameter of Air Pipe(mm)	8
Capacity of Magazine(PCS)	100
Nail Type	Staple
Nail Size(mm)	0.6x10x13(max)
Net Weight(kg)	0.85



AIR STAPLER A440K

Working Pressure(Bar)	5-8
Inner Diameter of Air Pipe(mm)	8
Capacity of Magazine(PCS)	100
Nail Type	Staple
Nail Size(mm)	1.26 x 1.05 x 40(max)
Net Weight(kg)	2.0





AIR STAPLER AN851B

Working Pressure(Bar)	5-8
Inner Diameter of Air Pipe(mm)	8
Capacity of Magazine(PCS)	150
Nail Type	Staple
Nail Size(mm)	1.8 x 1.4 x 51 (max)
Net Weight(kg)	2.9

NEW



AIR PIN NAILER AP625

Working Pressure(Bar)	4-8
Inner Diameter of Air Pipe(mm)	8
Capacity of Magazine(PCS)	100
Nail Type	Pin Nail
Nail Size(mm)	φ 0.63x25 (max)
Net Weight(kg)	0.85



AIR CONCRETE NAILER AST38

Working Pressure(Bar)	5-8
Inner Diameter of Air Pipe(mm)	8
Capacity of Magazine(PCS)	80
Nail Type	Steel Nail
Nail Size(mm)	φ 2.2 x 38 (max)
Net Weight(kg)	2.1



AIR CONCRETE NAILER AST64C

Working Pressure(Bar)	4-8
Inner Diameter of Air Pipe(mm)	8
Capacity of Magazine(PCS)	75
Nail Type	Steel Nail
Nail Size(mm)	φ 2.2 (18-64)
Net Weight(kg)	3.0



NEW

DIRECT-DRIVE AIR COMPRESSOR AQE2024F

Working Pressure(Bar)	8
Rated Power Input(HP)	2.5
Capacity(L)	24
Displacement(L/min)	206
Net Weight(kg)	26



NEW

OIL-FREE AIR COMPRESSOR AQE1824 / AQE02-1824

Working Pressure(Bar)	8
Rated Power Input(W)	800
Capacity(L)	24
Displacement(L/min)	≥ 77
Net Weight(kg)	27.0 / 23.0



NEW

OIL-FREE AIR COMPRESSOR AQE2850 / AQE02-2850

Working Pressure(Bar)	8
Rated Power Input(W)	1600
Capacity(L)	50
Displacement(L/min)	≥ 154
Net Weight(kg)	45.0



NEW

DIRECT-DRIVE AIR COMPRESSOR AQE2050F

Working Pressure(Bar)	8
Rated Power Input(HP)	4
Capacity(L)	50
Displacement(L/min)	206
Net Weight(kg)	37



GASOLINE GENERATOR AF3600

Power	Single-cylinder /4-stroke/Air-cooled 170F
Displacement(cc)	208
Rated Output Voltage (V~)	230
Rated Frequency (Hz)	50
Output Rating (W)	2800
Continuous Working Time(h)	11
Net Weight(kg)	45



GASOLINE GENERATOR AF6500

Power	Single-cylinder /4-stroke/Air-cooled 188F
Displacement(cc)	389
Rated Output Voltage (V~)	230
Rated Frequency (Hz)	50
Output Rating(W)	5000
Continuous Working Time(h)	8
Net Weight(kg)	73



GASOLINE WATER PUMP AQGZ50

Power Motor	Single Cylinder, 4-stroke, Air-cooled
Displacement (cc)	196
Rated Power (W)	3200/3600rpm
Input/output Diameter (mm)	50(2")
Pumping Head (m)	20
Flow (m ³ /h)	20
Self-priming Height	5
Self-priming Time (S)	≤140
Net Weight(kg)	25




GASOLINE WATER PUMP AQGZ80

Power Motor	Single Cylinder, 4-stroke, Air-cooled
Displacement (cc)	208
Rated Power (W)	4000/3600rpm
Input/output Diameter (mm)	80(3")
Pumping Head (m)	19
Flow (m ³ /h)	30
Self-priming Height	5
Self-priming Time (S)	≤160
Net Weight(kg)	30

GASOLINE WATER PUMP



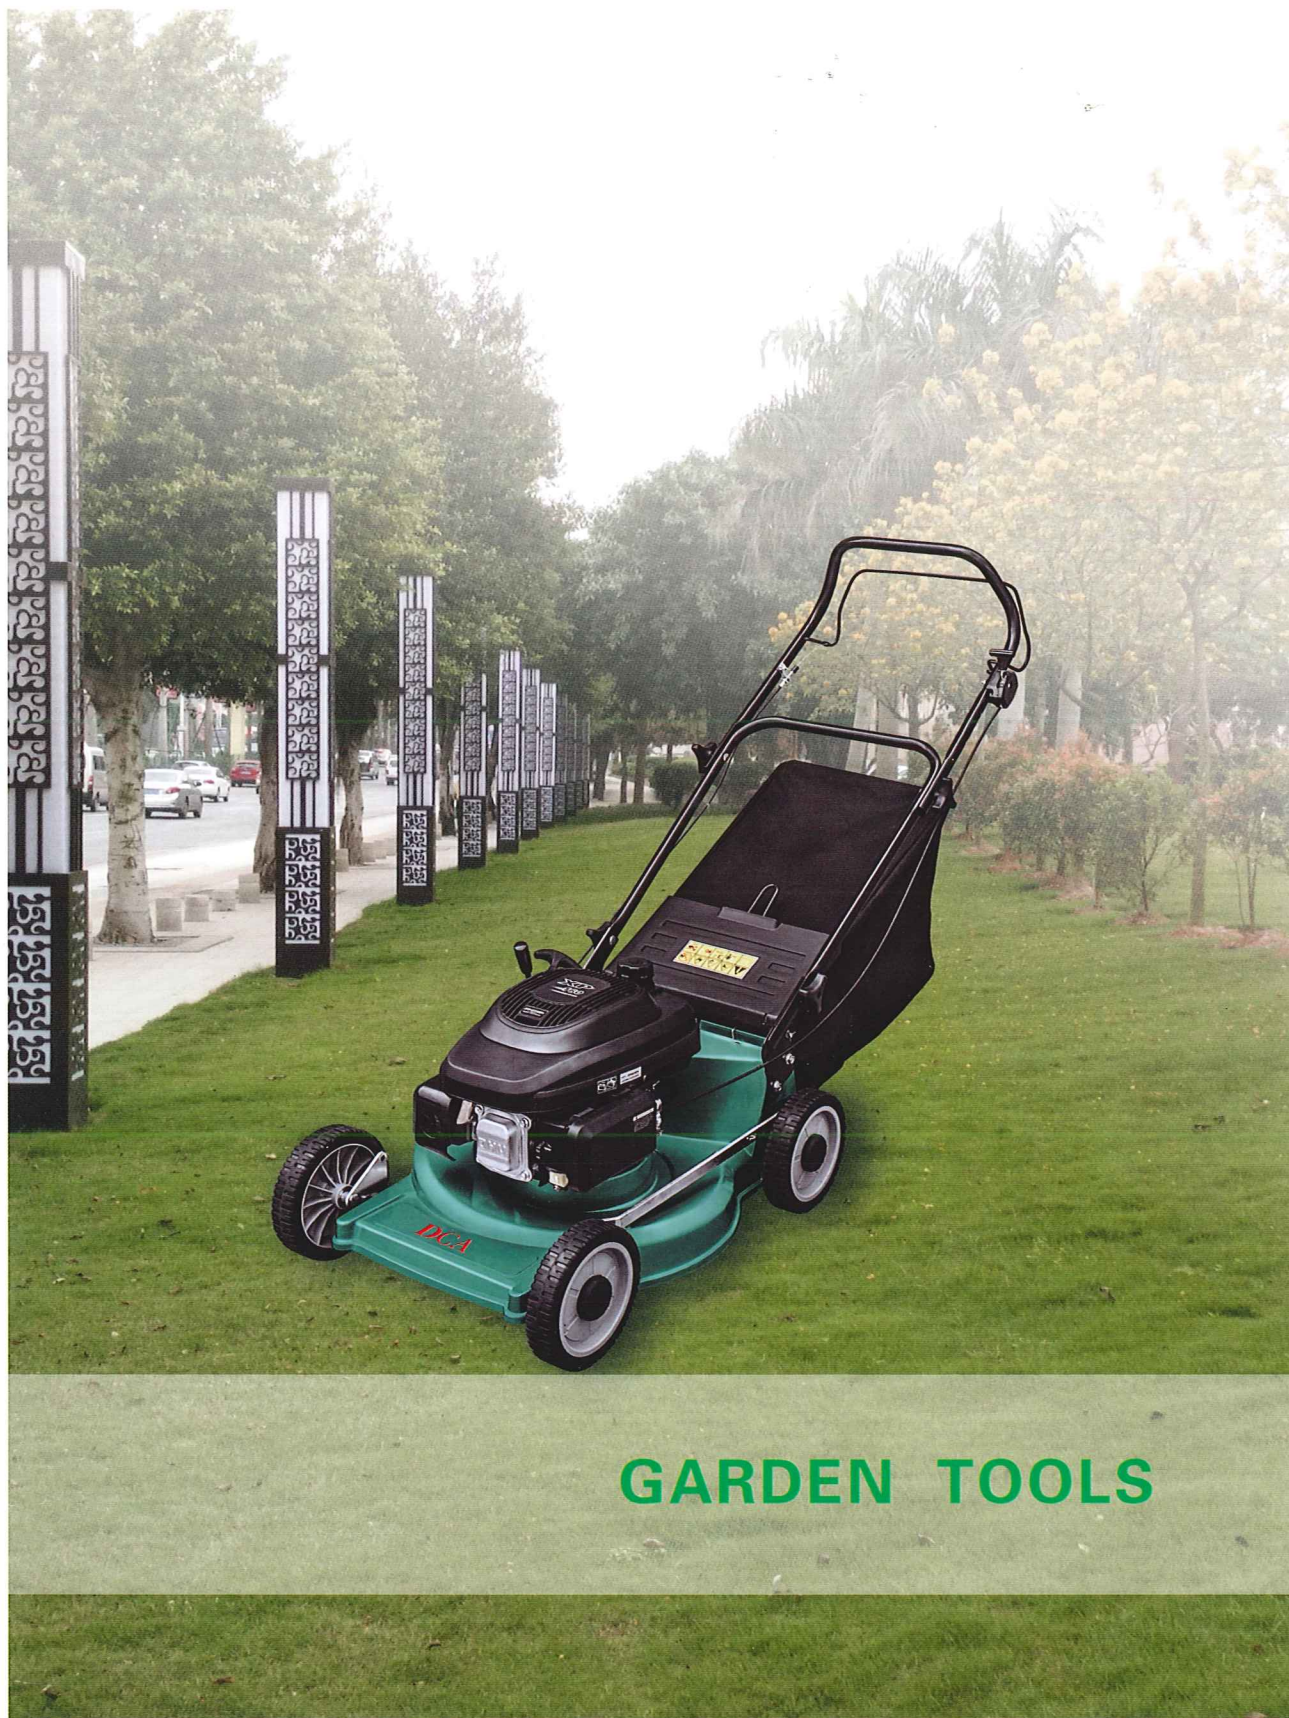

GARDEN TOOLS



NEW

PETROL LAWNMOWER ASSS48

- ◆ Die-casting highly-intensive aluminum base ensures durable use of this machine
- ◆ 7-step adjustable cutting height

Displacement(cc)	160
Width of Cut(mm)	480
Power	XP160A(Zongshen)
Blade	Flail Knife
Max. Torque & Corresponding Speed	8.1N.m/3000r/min
Net Weight(kg)	33.0



NEW

PETROL CHAIN SAW AYD40

Displacement(ml)	39.6
Power Input(W)	1500
Blade Length	16"
Net Weight(kg)	4.3



NEW

PETROL CHAIN SAW AYD54

Displacement(ml)	54
Power Input(W)	2200
Blade Length	20"
Net Weight(kg)	5.1



NEW

PETROL LAWNMOWER A02SSS48

Displacement(cc)	163
Width of Cut(mm)	480
Power	GXV160(Honda)
Blade	Flail Knife
Max. Torque & Corresponding Speed	8.8N.m/2500r/min
Net Weight(kg)	36.0



NEW

PETROL HEDGE TRIMMER A02GJB0.7KW

- ◆ Double-edged blade
- ◆ Rotatable handle ensures operating with either left or right hand.

Displacement(CC)	22.5
Width of Cut(mm)	600
Power	1E32FL-S
Blade Type	Double-edge Tooth
Power Input	0.7kw/7500r/min
Net Weight(k)	6



NEW

PETROL BRUSH CUTTER ACXB1.25KW

- ◆ 360°rotatable and vibration-reduction handle
- ◆ Highly-intensive safety guard ensures safe operation.

Displacement(CC)	42.7
Cutting Dia.(mm)	415
Blade Dia.	255
Power	1E40F-50D
Power Input	1.25KW/7000r/min
Net Weight(k)	7.9

NEW



PETROL BRUSH CUTTER ABG431

- ◆ 360°rotatable and vibration-reduction handle
- ◆ Highly-intensive safety guard ensures safe operation.

Displacement(CC)	31
Cutting Dia.(mm)	415
Blade Dia.	255
Power	139F
Power Input	0.7kw/6500rpm
Net Weight(k)	11



WELDING MACHINES

DC INVERTER MIG/MAG WELDER



NEW

	NBC-500) (Separated Type)	NBC-350 (Separated Type)	NBC-270 (Integral Type)	NBC-270 (Separated Type)
Power Voltage (V)	Three-phase AC 380±10%	Three-phase AC 380±10%	Three-phase AC 380±10%	Three-phase AC 380±10%
Frequency (Hz)	50/60	50/60	50/60	50/60
Rated Input Current (A)	31.8	21.4	10.1	10.1
ARC Current Range (A)	30-400		30-220	30-220
MIG Current Range (A)	30-450	30-350	30-220	30-220
MIG Voltage Range (V)	15.5-36.5	16.5-31.5	15.5-25	15.5-25
No-Load Voltage (V)	68	66	68	68
Wire Feeding Speed Range (m/min)	1.5~1.8	1.5~1.6	2.5-18	2.5-18
Applicable Wire Diameter (mm)	0.8/1.0/1.2/1.6	0.8/1.0/1.2	0.8/1.0/1.2	0.8/1.0/1.2
Rated Duty Cycle	60%	60%	60%	60%
Efficiency	85	85	85	85
Power Factor	0.93	0.93	0.92	0.92
Insulation Grade	F	F	F	F
Housing Protection Grade	IP21	IP21	IP21	IP21
Net Weight (Kg)	36	36	25	25

DC INVERTER AIR PLASMA CUTTER



NEW

	LGK-55	LGK-70	LGK-100
Power Voltage (V)	Three-phase AC 380±10%	Three-phase AC 380±10%	Three-phase AC 380±10%
Frequency (Hz)	50/60	50/60	50/60
Rated Input Current (A)	11.9	14.8	19
No-Load Voltage (V)	300	300	300
Output Current (A)	20-50	20-60	30-80
Rated Output Voltage (V)	100	104	112
Rated Duty Cycle (%)	60	60	60
No-Load Loss (W)	80	80	80
Efficiency (%)	85	85	85
Power Factor	0.93	0.93	0.93
Insulation Grade	F	F	F
Housing Protection Grade	IP21	IP21	IP21
Arc Striking Way	Non-contact Striking	Non-contact Striking	Non-contact Striking
Suggested Cutting Pressure (Kg/cm ²)	4-5	4-5	4-6
Net Weight (Kg)	15	15	15



DC INVERTER TIG WELDER			
Model	TIG 140	TIG 160	TIG 200
Power voltage(V)	single phase AV220V/AC240V $\pm 15\%$	single phase AV220V/AC240V $\pm 15\%$	single phase AV220V/AC240V $\pm 15\%$
Frequency (Hz)	50/60	50/60	50/60
Rated input current (A)	12.7	15.3	18
Output current. (A)	10-140	10~160	10~180
Rated output (V)	15.6	16.4	17.2
No-load volt. (V)	40	40	40
Arc Current Range (A)	—	—	—
Rated duty cycle(%)	60	60	60
No-load loss (W)	40	40	40
Arc striking way	HF	HF	HF
Efficiency (%)	85	85	85
Power factor	0.73	0.73	0.73
Insulation grade	F	F	F
Housing protection grade	IP21S	IP21S	IP21S
Weight (Kg)	8.6	9	9.4
Dimensions (mm)	455×270×345	455×270×345	455×270×345
Arc striking way	HF	HF	HF

DC INVERTER ARC WELDER(MMA)						
Model	MMA 120/ARC 120	MMA 140/ARC 140	MMA 160/ARC 160	MMA 200/ARC 200	MMA 250/ARC 250	MMA 300/ARC 300
Input voltage	1phase AV220V/AC240V $\pm 15\%$	1phase AV220V/AC240V $\pm 15\%$	1phase AV220V/AC240V $\pm 15\%$	1 phase AV220V/AC240V $\pm 15\%$	3 phase AV220V/AC380V $\pm 15\%$	1 phase AV220V/AC380V $\pm 15\%$
Frequency	50/60 Hz	50/60 Hz	50/60 Hz	50/60 Hz	50/60 Hz	50/60 Hz
Rated input current	17.3 A	20.8 A	24.6 A	30.5 A	14.5 A	18.6 A
No-load voltage	60 V	60 V	60 V	60 V	65 V	65 V
Output current	30-120 A	30-140 A	30-160 A	30-190 A	30-250 A	30-300 A
Rated output voltage	24.8 V	25.6 V	26.4 V	27.6 V	30 V	32 V
Current range (A)	—	—	—	—	—	—
Rated duty cycle	60%	60%	60%	60%	60%	60%
No-load loss	40 W	40 W	40 W	40 W	40 W	50 W
Efficiency	85%	85%	85%	85%	85%	85%
Power factor	0.73	0.73	0.73	0.73	0.93	0.93
Insulation grade	F	F	F	F	F	F
Housing protection grade	IP21	IP21	IP21	IP21	IP21	IP21
Weight	8 kg	8.7 kg	8.8 kg	9.2 kg	12 kg	24 kg
Dimensions (mm)	455×270×345	455×270×345	455×270×345	455×270×345	555 × 305 × 425	660 × 410 × 540

DCA

POWER TOOLS

JIANGSU DONGCHENG M&E TOOLS CO.,LTD.

Authorized Dealer:

SLB MATERIALS RESOURCES SDN BHD
(1193000-D)
No. 19, Jalan Molek 1/9, Taman Molek,
81100 Johor Bahru, Johor.
Tel: 07-3616392 Fax: 07-3616392
Email: ronaldlim_slb@yahoo.com
GST NO: 001147654144