

SUPERNOVA SERIES

FSF809A1



OUTDOOR POWER
INJECTION TECHNOLOGY

HIGH HARDNESS
TEMPERED GLASS

HIGH INTENSITY
BRACKETS

THICKEN DIE-CASTING
RADIATOR


Safety and stability

Well-known brand IC solution, overvoltage over-temperature protection, self-protection function in high-voltage, high-temperature working environment, 3000V high-voltage insulating aluminum PCB, pass 1500V electric strength test, L-N2000V and L/N-PE 2500V surge protection.



Thicken die-casting radiator

Superior die-casting aluminum, better heat dissipation helps better safety, longer lifespan.

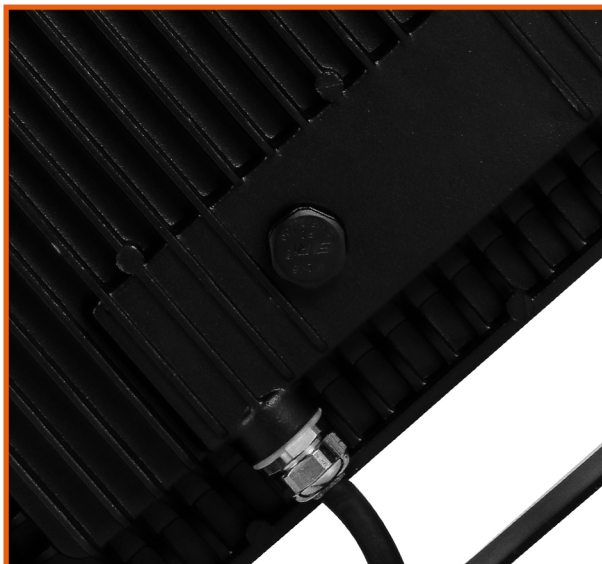

IP65

All the electrical parts covers by waterproof colloid, more radiators to avoid the water pumps into. The lamps by the pressure difference, better waterproofing performance.



FSL FOSHAN ELECTRICAL AND LIGHTING LED FLOOD LIGHT

Features:

- 1、 Well-known brand IC solution, overvoltage over-temperature protection, self-protection function in high-voltage, high-temperature working environment.
- 2、 Die-casting aluminum housing, unique unibody design, better heat dissipation, surface electrostatic spraying technology, anti-corrosion, super stability.
- 3、 All the electrical parts covers by waterproof colloid, more radiators to avoid the water pumps into the lamps by the pressure difference, better waterproofing performance
- 4、 Optical reflector integration, better efficiency, uniform illumination distribution.
- 5、 Superior SMD LED chips, better color rendering, high light efficiency, low light decay.


Application:

Ideal for factory, gymnasium, advertising board, building, horticulture design, lighting project etc, all the lighting required places.




Code	Voltage	Power	CCT	Lumen	CRI	PF	IP	Size	Beam angle	Life
FSF809A1 10W	220-240V	10W	3000/4000/6500K	720/800/800	≥80	0.9	65	103x24x96mm	115°	15000hrs
FSF809A1 30W	220-240V	30W	3000/4000/6500K	2160/2400/2400	≥80	0.9	65	160x26x138mm	115°	15000hrs
FSF809A1 50W	220-240V	50W	3000/4000/6500K	3600/4000/4000	≥80	0.9	65	206x34x160mm	115°	15000hrs
FSF809A1 100W	220-240V	100W	3000/4000/6500K	7200/8000/8000	≥80	0.9	65	270x33x210mm	115°	15000hrs
FSF809A1 150W	220-240V	150W	3000/4000/6500K	10800/12000/12000	≥80	0.9	65	379x36x285mm	115°	15000hrs
FSF809A1 200W	220-240V	200W	3000/4000/6500K	14400/16000/16000	≥80	0.9	65	445x35x345mm	115°	15000hrs

Photometric Data

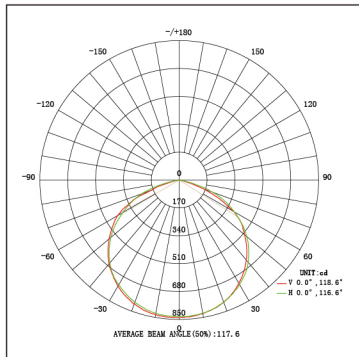

30W

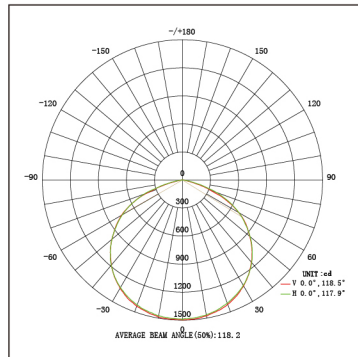

50W



FSL

FOSHAN ELECTRICAL AND LIGHTING CO.,LTD.

Add: 64 North Fenjiang Road, Foshan, China

www.chinafsl.com/en/

